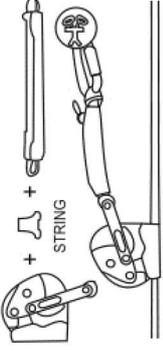


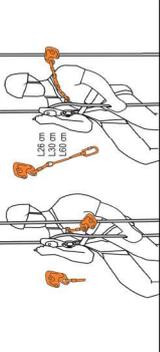



CONDITIONS OF USE OF GUIDED TYPE FALL ARRESTERS IN ACCORDANCE WITH EN 12841A

Guided type fall arrester	Connection with connector	Connection with lanyard without energy absorber	Use only with connecting equipment of the same manufacturer	Use with connecting equipment of another manufacturer	Certified with ropes	Carrying out the periodic examination	Manufacturer's recommended connection
ASAP Lock (since 2018) <i>Petzl</i>	no		yes <i>Asap Sorber 20</i> <i>Asap Sorber 40</i> <i>Asap Sorber Axes</i>	no	EN 1891 A Ø 10 - 13 mm	competent person	
	yes <i>OK Triact-Lock</i>	no	<i>Asap Sorber L71 20</i> <i>Asap Sorber L71 40</i> <i>Absorbica L57</i>	no	EN 1891 A Ø 10 - 13 mm		
Back Up <i>Singing Rock</i>	yes	no	no	yes	EN 1891 A Static Ø 11 and 12 mm	competent person	
Easy Access Easy Speed <i>CT (Climbing Technology)</i>	no	no	Link 20 Link 40	no	EN 1891 A Ø 11 mm EN 1891 A Ø 10,5 - 11 mm	competent person authorized by the manufacturer or competent person according to the current national regulations on PPE inspections	
Goblin (since 2019) <i>Camp</i>	yes	<i>Lanyard Webbing</i> <i>Goblin Rope</i> <i>Lanyard</i> L 26,30,60 cm	yes <i>Lanyard Webbing</i> <i>Goblin Rope Lanyard</i>	yes steel connector min. length 109mm +/- 5mm, min strength 25kN	EN 1891 A Ø 10 - 11 mm (with connector) EN 1891 A Ø 10,5 - 11 mm (with lanyard and two connectors)	periodic inspections are carried out at least once every 12 months	
Locker <i>Singing Rock</i>	no	yes, max 20cm recommended <i>Locker Sling</i>	no	yes	EN 1891 A Static Ø 11 mm	competent person for periodic examination and in accordance with the procedures specified by the manufacturer	
Monitor (since 2020) <i>Beal</i>	yes	no	yes <i>Mobile Lanyard</i> with integrated energy absorber	no	EN 1891 A Ø 11 - 13 mm	qualified person and must strictly observe the manufacturer's regular inspection methods	
Roper (EN 353-2) <i>Rock Empire</i>	yes	yes L 20 cm	no	no	EN 1891 A Ø 11 mm	manufacturer or a person authorized to check PPE - Category III: simple structures	